



Below Deck Circuit Breaker Panel

PN 4350 - 4 Position

PN 4352 - 6 Position

PN 4351 - 4 Position with 12V sockets

WARNING: *Disconnect all battery connections before beginning the installation. Mount in a dry location. Do not mount where flammable vapors may accumulate. (examples include engine room and propane locker)*


Specifications

Operating voltage:	12V DC Nominal
Maximum total continuous current:	45A
Circuit breaker rating:	15A
Required ring terminal:	M5 (#10)
Circuit breaker positive load terminal:	.25" Male quick connect
Maximum terminal stud torque:	2.25 N-m (20 in-lb)
Maximum mounting screw torque:	1.13 N-m (10 in-lb)

TO RESET A CIRCUIT BREAKER

Press switch to "OFF" first and then press switch to "ON".

Blue Sea Systems, Inc.
425 Sequoia Drive
Bellingham, WA 98226 USA
p 360.738.8230
f 360.734.4195
conductor@blueseasystems.com
www.blueseasystems.com

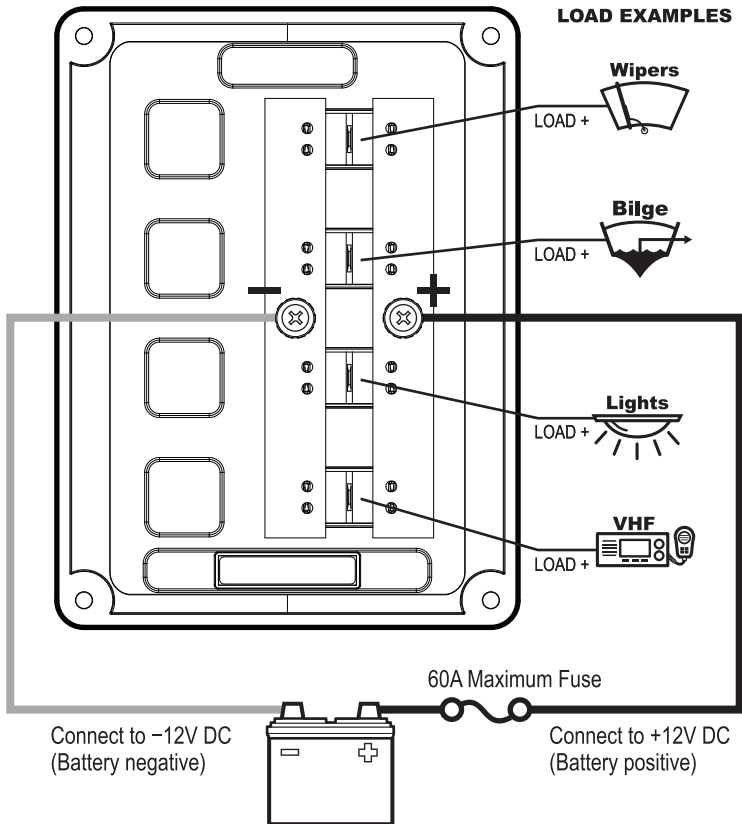

LOAD = Any appliance consuming power, i.e... stereo, lights, horn, etc.

PN 4350 shown for reference.

Connections for other products referenced in these instructions are identical.