



24v-500W

INVERTER

TRUE SINE WAVE



User Manual

500W 24v INVERTER

Rev. 3.2

Please Keep This Manual For Future Reference

For safe and optimum performance, the Enerdrive Inverter must be used properly. Carefully read and follow all instructions and guidelines in this manual and give special attention to the CAUTION and WARNING statements.

Disclaimer

While every precaution has been taken to ensure the accuracy of the contents of this guide, Enerdrive assumes no responsibility for errors or omissions. Note as well that specifications and product functionality may change without notice.

Important

Please be sure to read and save the entire manual before using your Enerdrive Inverter. Misuse may result in damage to the unit and/or cause harm or serious injury. Read manual in its entirety before using the unit and save manual for future reference.

Product Numbers - Inverter Series

EN1105S-24V	Inverter 500W 24v
-------------	-------------------

Inverter Owners Manual Rev. 3.2

Service Contact Information

Dometic Power & Control (Enerdrive) Pty Ltd
P.O. Box 9159, Wynnum Plaza, Queensland, Australia 4178
Ph: 1300 851 535 / Fax: 07 3390 6911
Email: sales@enerdrive.com.au | Web: www.enerdrive.com.au

Notice of Copyright

Enerdrive Inverter owner's manual © 2023 Enerdrive. All rights reserved. No part of this document may be reproduced in any form or disclosed to third parties without the express written permission of Dometic Power & Control (Enerdrive) Pty Ltd, P.O. Box 9159, Wynnum Plaza, Queensland,

Australia 4178. Enerdrive reserves the right to revise this document and to periodically make changes to the content hereof without obligation or organization of such revisions or changes, unless required to do so by prior arrangement.

Exclusions For Documentation And Product Usage

Unless specifically agreed to in writing, Dometic Power & Control (Enerdrive) Pty Ltd: makes no warranty as to the accuracy, sufficiency or suitability of any technical or other information provided in its manuals or other documentation.

Assumes no responsibility or liability for losses, damages, costs or expenses, whether special, direct, indirect, consequential or incidental, which might arise out of the use of such information. The use of any such information will be entirely at the user's risk

Reminds you that if this manual is in any language other than English although steps have been taken to maintain the accuracy of the translation, the accuracy cannot be guaranteed

Makes no warranty, either expressed or implied, including but not limited to any implied warranties of merchantability or fitness for a particular purpose, regarding these Enerdrive products and makes such Enerdrive products available solely on an "as is" basis

Shall in no event be liable to anyone for special, collateral, incidental, or consequential damages in connection with or arising out of purchase or use of these Enerdrive products. The sole and exclusive liability to Enerdrive, regardless of the form of action, shall not exceed the purchase price of the Enerdrive products described here in.

Table Of Contents

1. Introduction	4
IMPORTANT SAFETY INFORMATION:	4
2. Product Description	5
3. Installation	5
4. Unit Operation	8
5. Trouble Shooting	9
6. Specifications	10
7. Warranty	11

1. INTRODUCTION

Thank you for purchasing the Enerdrive Inverter. With our state of the art, easy to use design, this product will offer you reliable service for providing AC power and 5V USB power for your home, boat, caravan, 4WD or commercial vehicle. The Enerdrive Inverter can run many AC powered appliances when you need AC power anywhere. The 5V USB power can charge many USB powered devices. This manual will explain how to use this unit safely and effectively. Please read and follow these instructions and precautions carefully.

IMPORTANT SAFETY INFORMATION

This section contains important safety information for the Enerdrive Inverter. Each time, before using the Enerdrive Inverter, READ ALL instructions and cautionary markings on or provided with the inverter, and all appropriate sections of this guide. The Enerdrive Inverter contains no user serviceable parts. See Warranty section for how to handle product issues.

WARNING: FIRE AND/OR CHEMICAL BURN HAZARD

- Do not cover or obstruct any air vent openings and/or install in a zero-clearance compartment.

WARNING: FAILURE TO FOLLOW THESE INSTRUCTIONS CAN RESULT IN DEATH OR SERIOUS INJURY

- When working with electrical equipment or lead acid batteries, have someone nearby in case of an emergency.
- Study and follow all the battery manufacturer's specific precautions when installing, using and servicing the battery connected to the inverter.
- Wear eye protection and gloves.
- Avoid touching your eyes while using this unit.
- Keep fresh water and soap on hand in the event battery acid comes in contact with eyes. If this occurs, cleanse right away with soap and water for a minimum of 15 minutes and seek medical attention.
- Batteries produce explosive gases. DO NOT smoke or have an open spark or fire near the system.
- Keep unit away from moist or damp areas.
- Avoid dropping any metal tool or object on the battery. Doing so could create a spark or short circuit which goes through the battery or another electrical tool that may create an explosion.

WARNING: Shock Hazard. Keep away from children!

- Avoid moisture. Never expose unit to snow, water, etc.
- Unit provides 230 VAC, treat the AC output socket the same as regular wall AC sockets at home.

WARNING: Explosion hazard!

- DO NOT use the Enerdrive Inverter in the vicinity of flammable fumes or gases (such as gas bottles or large engines).
- AVOID covering the ventilation openings. Always operate unit in an open area.
- Prolonged contact to high heat or freezing temperatures will decrease the working life of the unit.

LIMITATIONS OF USE

Do not use in connection with life support systems or other medical equipment or devices.

2. PRODUCT DESCRIPTION

The Enerdrive Inverter package includes the items list below.

- Inverter base unit
- Owner's manual
- DC Input cable accessories

3. INSTALLATION


WARNING: Enerdrive recommends that all wiring be done by a certified technician or electrician to ensure adherence to the applicable electrical safety wiring regulations and installation codes. Failure to follow these instructions can damage the unit and could also result in personal injury or loss of life.

CAUTION: Before beginning your Enerdrive Inverter installation, please consider the following:

- The Enerdrive Inverter base unit should be used or stored in an indoor area away from direct sunlight, heat, moisture or conductive contaminants.
- When placing the unit, allow a minimum of 75mm of space around the unit for optimal ventilation.


Understanding the unit features

Image below shows unit features:

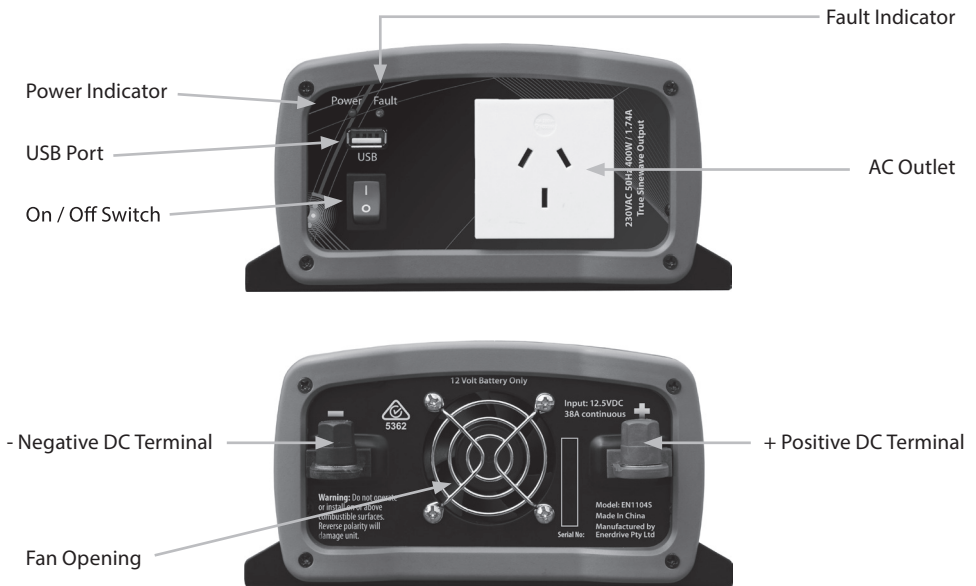

Material Prepare for Installation

Typical Wiring block diagram of the Enerdrive Inverter:

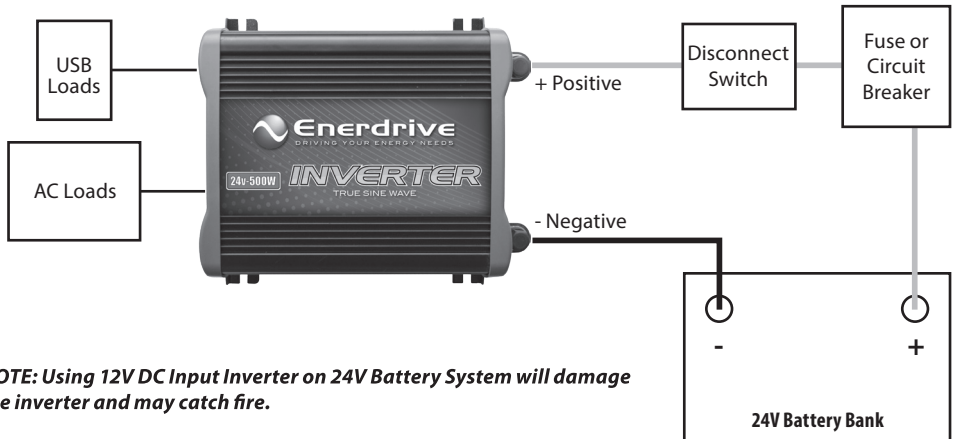

NOTE: Using 12V DC Input Inverter on 24V Battery System will damage the inverter and may catch fire.

Battery Bank:

- The use of deep cycle battery is highly recommended for power inverter application
- For battery size, you need to identify how long you wish to operate the load(s). Enerdrive does recommend that you purchase as much battery capacity as possible. See more on “Estimated Run time and Load” in Section 4.
- Please use 24V Battery Bank system for 24V DC Input Inverter (EN1105S-24).

Fuse or Circuit Breaker:

- DC-rated fuse or DC-rated circuit breaker connected along the DC positive line is required.
- Select a fuse or circuit breaker with 35A/ 30V minimum rating for the 24V DC Input Inverter.
- Based on the size of the battery bank chosen on the 24V Battery Bank system above, determine the overall short circuit current rating of the battery bank from the battery manufacturer. The fuse or circuit breaker chosen has to be able to withstand the short circuit current that may be generated by the battery bank.

Disconnect Switch:

- Select a Disconnect Switch with the same or higher rating of the selected fuse or circuit breaker from the above.
- The Disconnect Switch is used to disconnect the DC power between the power inverter and the battery bank during service, maintenance or trouble shooting.

DC Input Cable:

- Use of low resistance wire is required for all the DC connections between the inverter and the battery bank.
- Use minimum 6mm² cable with a maximum length of 1.5m for 24v inverter systems.

Installing the Enerdrive Inverter System

WARNING: Electrical Shock Hazard

The unit 'On/Off' switch does not disconnect the DC power from the battery. Use the DC Disconnect Switch or disconnect the DC input cables connection to disconnect the DC power from the battery before working on any circuits connected to the unit. Failure to follow these instructions can result in death or serious injury.

CAUTION: Reverse the DC Input terminal will damage the unit and cannot be repaired. Damage caused by reverse polarity connection is not covered by the warranty.

Inverter Installation:

- Choose an appropriate mounting location.
- For indoor use, the orientation of the unit can be mounted in any direction except with the DC Input panel facing downwards.
- For RV installation, the unit has to be mounted horizontally.
- Use mounting template below to mark the positions of the mounting screws.
- Drill the 4 mounting holes and place the inverter in position and fasten the inverter to the mounting surface.



Inverter DC Input Connection:

CAUTION: Reversing the DC Input terminal will damage the unit and cannot be repaired. Damage caused by reverse polarity connection is not covered by the warranty.

- Connect one end of the negative DC input cable to the Inverter DC negative terminal. Connect the other end of the negative DC input cable to the battery negative terminal.
- Make sure the Disconnect Switch is in the OFF position.
- Connect one end of the positive DC input cable to the Inverter DC positive terminal. Connect the other end of the positive DC input cable to one of the terminal of the Disconnect Switch.
- Connect a DC input cable between the other terminal of the Disconnect Switch and one side of the terminal of the fuse holder.
- Connect a DC input cable between the other terminal of the fuse holder and the battery positive terminal.
- Install the selected fuse to the fuse holder.
- Turn Disconnect Switch to ON position.

- Attach the red ring-type connector to the positive (+) DC terminal (red) on the inverter and connect the black ring type connector to the negative (-) DC terminal (black) on the inverter.
- Tighten the nut on each DC terminal.
- Insert the light plug of this cable to the fused 24V lighter plug socket.
- Unit is ready for use.

Connect unit with optional accessories using the Battery clips cable:

CAUTION: Please be sure all the connections are tight before the use of the unit.

- Attach the red ring-type connector to the positive (+) DC terminal (red) on the inverter and connect the black ring type connector to the negative (-) DC terminal (black) on the inverter.
- Attach the negative (black) clip to the negative (-) battery terminal.
- Attach the positive (red) clip to the fuse or circuitry breaker of the 24V battery bank as indicated on 'Typical Wiring block diagram of the Power Inverter' on page 5.
- Unit is ready for use.

Testing the Inverter:

- Turn unit on by using the On/Off button on the unit. The 'Power' light turns on indicating the Enerdrive Inverter is ON. AC output is now available.
- Plug in a small AC load like a 25W table lamp or small appliance to the AC socket to verify AC is available.
- The unit is successfully installed and functioning properly.

4. UNIT OPERATION**WARNING: RISK OF EQUIPMENT DAMAGE**

- Do not plug surge-protected power bars into the unit's AC outlets. The surge protected components on the surge-protected power bar may not like the modified sine wave output generated by the inverter.
- Do not connect an AC power source like utility power or generator to the unit AC outlets.

• Turn ON and OFF the unit

- Toggle the On/Off switch to 'On' position to turn unit on.
- 'Power' indicator will turn green.
- AC Output is available at the AC output socket and 5V USB port.
- Toggle the On/Off switch to 'Off' position to turn unit off. 'Power' indicator will turn off.

Understanding the LED indicators

- Power indicator: Indicator turn on indicate unit is ON.
- Fault indicator: Indicator turns on indicate fault was detected. Unit has shutdown. To reset the unit, remove the fault condition and reset unit by using the toggle switch and turn unit off and on again.

Understanding the fan operation

The fan on the unit will automatically turns on when it sense the internal temperature of the unit reach to its preset level.

AC Load on Inverter

Although the Inverter can provide high surge power up to two times the rated output power, some appliances may still trigger on the inverter protection system. A higher power inverter is required for those appliances.

Estimate Run time on Load

The following run times are an estimate based on using a 24V-60A battery bank for 24V systems. Actual run time may vary.

Load	Consumption	Estimate Run time
Cordless Phone	5W	150 hrs
Clock/Radio	8W	100 hrs
Table Lamp	40W / 60W	27 hrs/ 18 hrs
Freezer (249 Litre)	80W	15 hrs
20" LCD TV	100W	11.5 hrs
Flooded Light	500W	1hr
Sump Pump (1/2 hp)	350W	Not applicable (surge too high)

5. TROUBLESHOOTING

To trouble shoot the unit, please note the error code display on the main unit and review the "Understanding the Error Codes" in section 4.

Problem	Symptom	Solution
No AC output and 'Power' indicator is off.	The unit is off	Turn unit ON using the toggle switch
	No power to inverter	Check fuse or the Disconnect switch (if installed) is either blown or turn OFF
No AC output. 'Fault' indicator is ON	Unit detect fault and has shutdown	Verify the error condition and make correction and reset unit

6. SPECIFICATIONS

Note: Specifications are subject to change without notices.

Specifications	
Inverter	EN1105S-24
AC Output Power	500 Watt
AC Output Current	2.17A
AC Output Voltage	230Vac 50Hz
AC Output Waveform	True Sinewave (<3% THD)
DC Input Voltage	25.0 VDC
No Load Current	<0.5A
No Load Current (Power Save OFF)	<0.5A
No Load Current (Power Save ON)	<0.1A
DC Operating Range	21.0 - 31.0 VDC
Under Voltage Alarm	22.4 VDC
Under Voltage Alarm Recovery	22.6 VDC
Under Voltage Shutdown	21.0 VDC
Under Voltage Recovery	23.6 VDC
Over Voltage Shutdown	31.0 VDC
Over Voltage Recovery	30.0 VDC
AC Output Socket	AU
Display	
Power Indicator	Yes (Green)
Warning & Fault Indicator	Yes (Red)
USB Output (5V)	2.1A
Safety & Environmental	
Agency Markings	CE
Operating Temp.	0° to 40°
Storage Temp.	-20° to 60°
Relative Humidity	5 - 90% non-condensing
Operating Altitude	Up to 2000m above sea level
Weights & Dimensions	
Weights	1.73 kg
Dimensions (LxWxH)	312 x 175 x 87mm



7. WARRANTY



5 Year Warranty

In the unlikely event that a technical issue arises with an Dometic Power & Control (Enerdrive) Pty Ltd product, customers are encouraged to initially contact the Enerdrive Support Team on 1300 851 535 or support@enerdrive.com.au for immediate and efficient expertise and first class product support.

Important Note: Consumer Protections

If you have purchased your product in Australia, you should be aware that:

This warranty is provided in addition to other rights and remedies held by a consumer at law. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Dometic Power & Control (Enerdrive) Pty Ltd warrants that its Products will be free from defects in materials and workmanship (subject to limits, and in normal conditions, as described in the complete Enerdrive Warranty Policy) for up to 5 years from the date of purchase.

For full terms, conditions and claim process, refer to the Enerdrive website.
<https://enerdrive.com.au/warranty/>



ENERDRIVE

DOMETIC

Dometic Power & Control (Enerdrive) Pty Ltd

P.O. Box 9159, Wynnum Plaza, Queensland, Australia 4178

Ph: 1300 851 535 / Fax: 07 3390 6911

Email: support@enerdrive.com.au

Web: www.enerdrive.com.au